


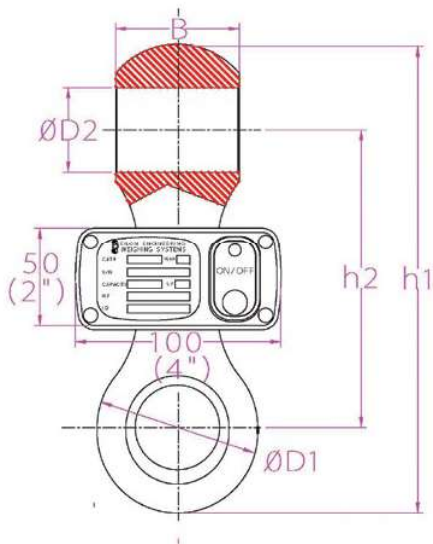

Cat no.	Full range	Resolution		Load Cell weight		H1 (max.)		H2 (max.)		B (max.)		L		Ø D1 (max.)		Ø D2 (min.)		Matching anchor shackle size*
	tons	kgs	lbs	kgs	lbs	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	inch
S-005	0.5	0.2	0.5	0.3	0.7	125	4.9	92	3.7	16	0.7	100	4	31	1.3	17	0.66	1/2 7/16 3/8
S-01	1	0.5	1	0.3	0.7	125	4.9	92	3.7	16	0.7	100	4	31	1.3	17	0.66	1/2 7/16 3/8 _{sw}
S-02	2	1	2	0.3	0.7	125	4.9	92	3.7	16	0.7	100	4	31	1.3	17	0.66	1/2 7/16 3/8
S-03	3	1	2	0.3	0.7	137	5.4	100	4	19	0.75	100	4	38	1.5	21	0.82	5/8 1/2
S-05	5	2	5	0.5	1	147	5.8	105	4.2	26	1	100	4	43	1.7	23	0.9	3/4 5/8
S-10	10	5	10	1.4	3.1	195	7.7	131	5.2	41	1.6	100	4	61	2.4	36	1.4	1 1/4 1 1/8 1
S-12	12.5	5	10	1.4	3.1	195	7.7	131	5.2	41	1.6	100	4	61	2.4	36	1.4	1 1/4 1 1/8 1
S-15	15	5	10	2.5	5.5	220	8.7	141	5.6	45	1.7	100	4	74	3	40	1.5	1 3/8 1 1/4 1 1/8
S-20	20	10	20	2.5	5.5	220	8.7	141	5.6	45	1.7	100	4	74	3	40	1.5	1 3/8
S-25	25	10	20	3.7	8	240	9.4	150	5.9	58	2.3	100	4	87	3.4	44	1.7	1 1/2
S-30	30	10	20	3.7	8	240	9.4	150	5.9	58	2.3	100	4	87	3.4	44	1.7	1 1/2
S-40	40	20	50	8	17	320	12.6	195	7.7	71	2.8	100	4	115	4.5	60	2.3	2 1 3/4
S-50	50	20	50	8	17	320	12.6	195	7.7	71	2.8	100	4	115	4.5	60	2.3	2
S-80	80	50	100	18	40	405	16.9	255	10	97	3.8	100	4	145	5.7	76	3	2 1/2
S-100	100	50	100	28	60	450	17.7	275	10.8	121	4.8	155	6.2	165	6.5	81	3.18	CROSBY No. 2160 125t
S-125	125	50	100	28	60	450	17.7	275	10.8	121	4.8	165	6.6	165	6.5	81	3.18	CROSBY No. 2160 125t
S-200	200	100	200	57	121	575	22.6	350	13.8	145	5.7	165	6.6	210	8.3	106	4.2	CROSBY No. 2160 200t
S-250	250	100	200	106	225	800	31.5	490	19.3	178	7.0	245	9.7	260	10.2	138	5.4	CROSBY No. 2140 250t or No. 2160 300t
S-300	300	100	200	106	225	800	31.5	490	19.3	178	7.0	245	9.7	260	10.2	138	5.4	CROSBY No. 2160 300t

› USE SHACKLES WITH S.W.L. (SAFE WORKING LOAD) EQUAL TO, OR GREATER THAN SYSTEM'S FULL RANGE.

› The company reserves the right to make changes without notice.